Apollo Enterprises
3007 Bunsen Avenue,
Ventura CA 93003
805-644-1504 or 800-873-1399
Information@ApolloPumps.com

Aquarium Pump AM-3

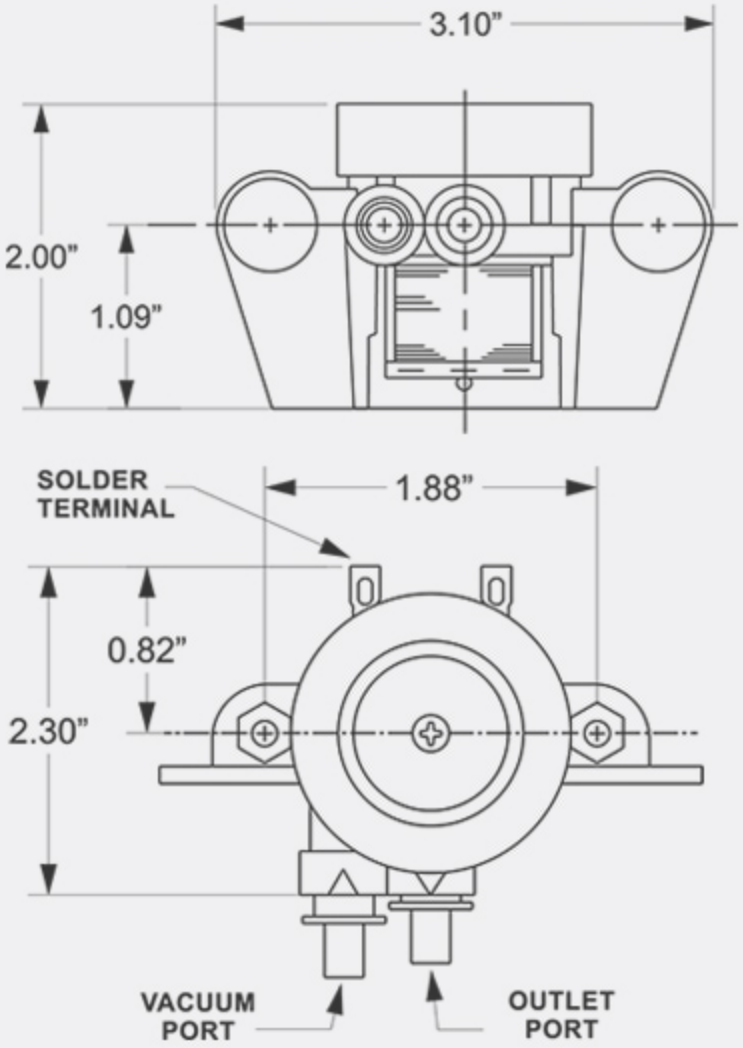

Material of Construction:

Pump Body: Acetal

Diaphragms: Thermo-Plastic Elastomer (Std)

Valves:Silicone

Fasteners: Plated Steel

Enclosures: Styrene (Std)

Enclosure Dimensions: 4.25"L x 3.50"W x 2.80"H

Motor: Fixed Coil, Oscillating Magnet 60Hz Natural Frequency

Electrical Connections: .170" W Solder Terminals

Electrical Specifications: 3 Watts Power, +/- 10%, 115V, 5 – 20 Gallon Capacity

Product Specifications:

Pump Design: Single Diaphragm, Duckbill Valves

Net Weight: 1 Lb

Pumped Media's: Air & Gases Compatible with Materials of Construction

Ports-

Outlet: .20" OD x .30" L Smooth Straight Elbow

Inlet: 5 Micron Filter

Operating Temperature: 30° - 105° Fahrenheit

Current Values Typical. DC Voltages Require Inverter Circuitry

Voltage	6VDC	9VDC	12VDC	24VDC	12VAC	24VAC	115VAC	220VAC
Current-AMPS	0.70	0.41	0.35	1.08	0.37	0.18	.037	.018

*Requires Solid Mount
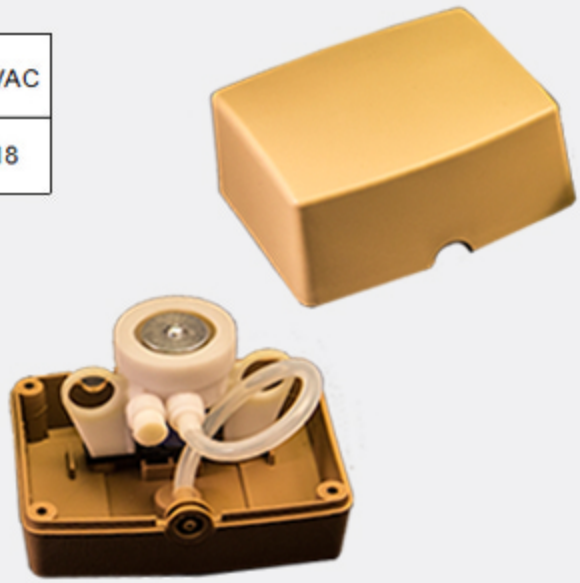
Pressure – PSI	0	.25	.5	.75	1.0	1.5	2.0	3.0*
Flow – SCFH	6.0	3.3	2.5	1.5	1.0	.70*	.20*	0
Flow - LTR/MIN	2.8	1.6	1.2	0.7	.5	.3	.1	0